

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 March 2004 (18.03.2004)

PCT

(10) International Publication Number
WO 2004/023705 A1

(51) International Patent Classification⁷: H04L 1/06, 1/00

(21) International Application Number:
PCT/GB2003/003741

(22) International Filing Date:
1 September 2003 (01.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0220399.0 3 September 2002 (03.09.2002) GB

(71) Applicant (for all designated States except US): QINETIQ LIMITED [GB/GB]; Registered Office, 85 Buckingham Gate, London SW1 6PD (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): FLETCHER, Paul, Nicholas [GB/GB]; Merchant Ventures Building, University of Bristol, Woodlands Road, Bristol BS8 1UB (GB). DEAN, Michael [GB/GB]; QinetiQ Limited, Malvern Technology Centre, St. Andrews Road, Malvern, Worcestershire, WR14 3PS (GB). PIECHOCKI, Robert,

Jan [PL/GB]; Merchant Ventures Building, University of Bristol, Woodlands Road, Bristol, BS8 1UB (GB). NIX, Andrew [GB/GB]; Merchant Ventures Building, University of Bristol, Woodlands Road, Bristol BS8 1UB (GB). CANAGARAJAH, Nishan [GB/GB]; Merchant Ventures Building, University of Bristol, Woodlands Road, Bristol BS8 1UB (GB). MC, GEEHN, Joe [GB/GB]; Merchant Ventures Building, University of Bristol, Woodlands Road, Bristol BS8 1UB (GB).


(74) Agent: DAVIES, P.; IP QinetiQ Formalities, Cody Technology Park, A4 Building, Room G016, Ively Road, Farnborough, Hampshire GU14 0LX (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: MAXIMUM LIKELIHOOD BASED INTERFERENCE CANCELLATION FOR SPACE-TIME CODED SIGNALS

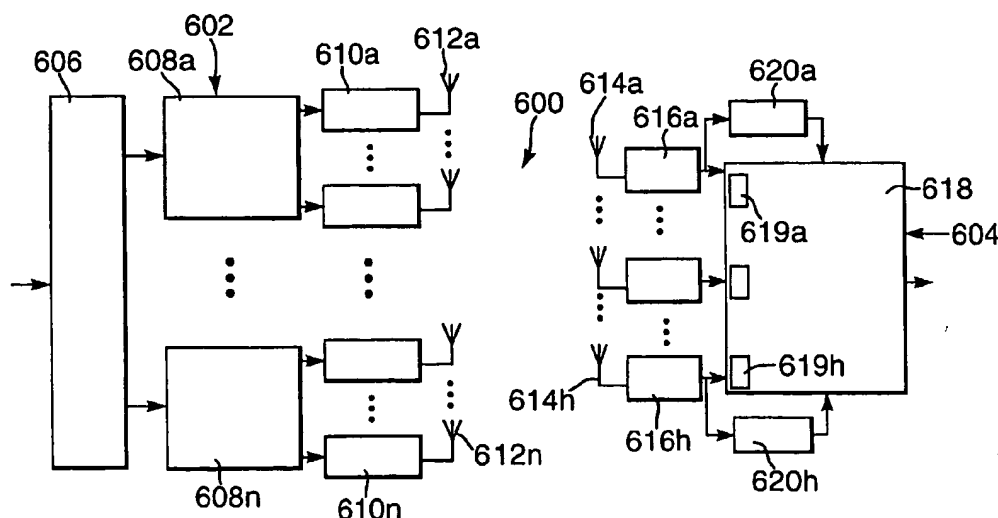

(57) Abstract: A signal processing apparatus (604) comprises a plurality of receiving elements (614a-h), weighting means (616a-h), and decoding means (618). Each of the receiving elements (614a-h) has respective weighting means (619a-h) associated therewith at the decoding means (618), and is arranged to receive a plurality of signals transmitted from a plurality of transmitters (612a-n). The weighting means (616a-h) are arranged to apply a complex weighting function to each of a number of the signals received by the receiving elements (614a-h) at a given frequency in order to null the number of signals. The decoding means (618) are arranged to determine a symbol or codeword associated with a non-nulled signal and to incorporate the symbol or codeword in the determination of at least one further symbol or codeword.

WO 2004/023705 A1



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

Published:

— *with international search report*

DT06 Rec'd PCT/PTO 0 2 MAR 2005

MAXIMUM LIKELIHOOD BASED INTERFERENCE CANCELLATION
FOR SPACE-TIME CODED SIGNALS

This invention relates to a signal processing method and apparatus.
More particularly, but not exclusively, it relates to a method and
5 apparatus for decoding symbols and/or codewords in a multiple input-
multiple output orthogonal frequency division multiplex wireless network
system.

It is known to convert a stream of serial data symbols to a parallel block
10 of data symbols and transmit each of the symbols via a respective one of
a number of transmitters in order to increase data transfer rate across a
wireless network, for example the BLAST architecture. Space-time
coding improves the quality of data links between transmitter and
receiver by increasing redundancy in codewords transmitted compared to
15 the input symbols and by producing multiple codewords with significant
differences therebetween for each frame of symbols coded..

Space-time trellis codes (STTC) bridge the divide between the two
above-mentioned techniques wherein individual parallelised data streams
20 are protected by space-time codes. This yields improved performance in
terms of the robustness of communications and therefore gives an
improved veracity of data associated with space-time codes. Such a
system is particularly attractive for multiple input-multiple output
systems that have a large number of antenna elements, for example four
25 or more transmitters and four or more receivers. This is due to the
system allowing high data transfer rates with high confidence in data
transfer quality.

Upon receiving a corrupted codeword an ideal STTC receiver performs a
30 search over all possible codewords and chooses a vector or symbols that
maximises a likelihood function, for example using a Viterbi decoder on

codewords received by a number of antennas. However, the complexity of the solution of such a likelihood function increases exponentially with the number of transmitter elements. Also, increasingly complex modulation schemes can be employed, for example 64 quadrature
5 amplitudes modulation (QAM). In 64-QAM there are sixty-four distinct symbols in vector space, each one representing a six bit binary sequence. This too adds to the complexity of solving the vector Viterbi equation. Thus, a computational solution to the problem is prohibitively computationally complex to implement practically.

10

One approach to reduce the computational complexity of solving a maximum likelihood equation is to employ group interference suppression (GIS). In GIS spatial suppression of codewords originating from undesired transmitters occurs at the receivers leaving only a
15 codeword from a desired transmitter to be detected. This is achieved by weighting signals received at the receivers in order to produce a zero, or near zero, signal in a given direction, a process known as "nulling". It will be appreciated that the terms direction may not be a physical direction in the case of an indoor or multipath rich environment.

20

Once the desired codeword is determined the entire nulling process has to be repeated for the next codeword. This is clearly a cumbersome and time consuming process.

25 In orthogonal frequency division multiplexing (OFDM) as shown in Figure 2, a number of sub-carrier frequencies, each being a harmonic of a fundamental, lowest frequency, sub-carrier, have complex data values imposed upon them by use of an inverse fast Fourier transform (IFFT) unit. The complex data values vary the phase and amplitude of the sub-
30 carriers away from their unperturbed state. Upon transmission, the sub-carriers superpose to produce a non-sinusoidal signal. Upon reception of

the signal by a receiver a fast Fourier transform (FFT) is carried out upon the signal to recover the sub-carriers and hence their associated data values. A typical wireless local area network (WLAN) data transmission will include sixty-four sub-carriers, for example Hiperlan 2
5 and IEEE 802.11a.

In the case of an OFDM STTC system each sub-carrier frequency from one transmitter will interfere with the same sub-carrier frequency originating from any other transmitter. There will however be no
10 interference between sub-carriers of different frequencies when the cyclic prefix is at least as long as the channel excess delay. Thus, in an OFDM STTC system the complexity of applying a conventional GIS solution increases many fold, as spatial nulling has to be performed not only for each receiver element but also at each individual sub-carrier frequency.
15 This substantially increases the complexity of implementation of such a system and increases the computational complexity of the GIS technique still further.

It is an object of the present invention to provide a method of signal
20 processing that, at least partially, ameliorates at least one of the above-mentioned problems and/or disadvantages.

It is a further object of the present invention to provide a signal processing apparatus that, at least partially, ameliorates at least one of
25 the above-mentioned problems and/or disadvantages.

According to a first aspect of the present invention there is provided a method of determining each of a plurality of data symbols or codewords from a plurality of signals comprising the steps of:

(i) weighting a number of said signals so as to substantially null said number of signals, using weighting means;

(ii) determining a symbol or codeword associated with a, or each, non-nulled signal using processing means arranged to execute a maximum likelihood estimation process upon said, or each, non-nulled signal;

(iii) reducing the number of signals nulled by the weighting means by at least a number of non-nulled signals in step (ii);

10

(iv) altering the maximum likelihood metric in accordance with the data symbol derived at step (ii); and

(v) repeating steps (ii) to (iv).

15

This method has the advantage over prior art methods that as successively fewer input sources are suppressed, nulled, at each iteration of the method the number of spatial degrees of freedom available for sampling increases due to step (iv). This increases diversity on receive for sampling, which in turn increases the confidence with which later data symbols can be determined.

20

The method may include sampling data, typically channel state information (CSI), to determine which signals are to be nulled at either, or both, of steps (i) and (iii). The method may include selecting signals with lowest input power to be nulled at either, or both, of steps (i) and (iii). This has the advantage that those signals with the highest input power have their associated data symbols determined first. This is important as high input powers are usually associated with high signal to noise ratios and thus confidence in the initially determined symbols is increased. High confidence in the initially determined symbols is

30

important as any subsequent determination of further symbols employs these initial symbols and errors propagate in such a trellis-coded system.

The method may include determining symbols that are, or form part of, codewords, the codewords typically being associated with streams of symbols input to a transmitting means.

The method may include separating frequencies of at least some of the plurality of signals by multiples of a harmonic frequency. The method may include orthogonalising the plurality of signals. Thus, the method is directly applicable to orthogonal frequency division multiplexing (OFDM) of signals.

The method may include providing a plurality of receivers arranged to receive said plurality of signals prior to step (i). The method may include transmitting a signal that is a sum of said signals from a plurality of spatially separated transmitters.

The method may include deriving a matrix of complex weighting coefficients by the processing means to be applied to said weighting means in order to null said signals at either of steps (i) or (ii).

The method may also include applying said weighting coefficients to said weighting means.

The method may include using the vector Viterbi algorithm at step (ii).

The method may include parallelising an input serial stream of data symbols prior to transmission.

The method may include coding a frame of parallelised data symbols typically using space-time coding prior to transmission.

The method may include coding a frame of 2^n parallelised data symbols prior to transmission, where n is an integer selected from the following list: 1, 2, 3, 4, 5, 6, 7, 8, 16, 32, 64, 128, > 128 .

5

The method may include producing at least one codeword, preferably two, during the coding operation.

10 The method may include reducing the number of nulled channels between steps (ii) and (iv).

The method may include increasing the diversity upon receive of the plurality of signals.

15 According to a second aspect of the present invention there is provided a signal receiving apparatus comprising a plurality of receiving elements, weighting means, and decoding means, each of the receiving elements having respective weighting means associated therewith, each of the receiving elements being arranged to receive a plurality of signals
20 transmitted from a plurality of transmitters, the weighting means being arranged to apply a complex weighting function to each of a number of said signals received by the receiving elements at a given frequency in order to null said number of said signals, the decoding means being arranged to determine a symbol or codeword associated with a non-nulled
25 signal and to incorporate said symbol or codeword in the determination of at least one further symbol or codeword.

The receiving apparatus may include at least four receiving elements.

30 Each receiving element may have a channel state information (CSI) unit associated therewith, and each CSI unit may be arranged to compensate

for distortion to the signal received by the apparatus due to variations in the transmission path of said signal.

5 The receiving apparatus may include an FFT unit between each receiving element and the decoding means, and the FFT units may be arranged to separate each of a plurality of sub-carrier signals from said received signals.

10 The decoding means may include processing means arranged to carry out a maximum likelihood estimation procedure upon a sub-carrier signal received at a receiving element in order to determine the symbol.

The processing means may be arranged to carry out whole vector Viterbi decoding upon the signal.

15

The apparatus is preferably arranged to execute a method in accordance with the first aspect of the present invention.

20 According to a third aspect of the present invention there is provided a method of increasing data transfer capacity across a network comprising the steps of:

(i) receiving a signal comprising a plurality of data carrying sub-channels transmitted by a plurality of transmitter elements at a plurality
25 of receiving elements;

(ii) suppressing a component of the signal associated with a given sub-channel transmitted by all but one transmitting element;

(iii) determining a symbol or codeword associated with said signal received on said given sub-channel at said one receiving element using a maximum likelihood estimation process; and

- 5 (iv) incorporating the symbol or codeword into the maximum likelihood estimation process for the determination of at least one other symbol or codeword.

The method may include parallelising data and encoding the data as a
10 symbol or a space time codeword prior to transmission of the symbol or codeword over the network.

The method may include providing more than four receiving elements arranged to receive the signal from the network, and the method may
15 include providing more than four transmission elements arranged to transmit the signal over the network.

The method may include applying a whole vector Viterbi decoding to the signal at step (iii).
20

The method may include providing the network in the form of a wireless local area network (WLAN), for example IEEE802.11a, HiperLan 2 or Bluetooth networks or a telecommunications network. It will be appreciated that in the case of current narrow band Bluetooth networks
25 space-time trellis coding is applied.

According to a fourth aspect of the present invention there is provided a computer readable medium having stored therein instructions for causing a device to execute the method according to either of first or third
30 aspects of the present invention.

According to a fifth aspect of the present invention there is provided a program storage device readable by a machine and encoding a program of instructions which when operated upon the machine cause the machine to operate as the apparatus in accordance with the second aspect of the present invention.

The invention will now be further described, by way of example only, with reference to the accompanying drawings, in which:

10 **Figure 1** is a representation of a quaternary phase shift keying (QPSK) signalling scheme of the prior art;

Figure 2 is a representation of an orthogonal frequency division multiplexing (OFDM) modulation scheme of the prior art;

15 **Figure 3** is a schematic representation of generation of codewords from a serial input streams of data, of the prior art;

Figure 4 is a schematic representation of a spatial nulling scheme of a phased array antenna of the prior art;

Figure 5 is a representation of possible symbols and a data vector according to both the prior art and the present invention;

25 **Figure 6** is a schematic representation of a wireless multiple input-multiple output (MIMO) space-time trellis coding (STTC) system according to at least an aspect of the present invention;

30 **Figures 7a to 7d** are graphs showing an improvement in performance of a receiver according to an aspect of the present invention compared to a prior art receiver;

Figure 8 is a flow diagram detailing a method of signal processing in accordance with to the first aspect of the present invention; and

- 5 **Figure 9** is a flow diagram detailing a method of signal processing in accordance with the third aspect of the present invention.

Referring now to Figure 1, a constellation 100 of a known quaternary phase shift keying (QPSK) signalling scheme comprises four symbols
10 102a-d spaced apart in the complex plane. The relative complex and real components of the symbols 102a-d denote which two bit binary sequence is represented by a given symbol, for example positive real and positive imaginary components, symbol 102a represent the two bit binary sequence 00. Thus it is possible to represent two bits using a single
15 symbol using QPSK, effectively doubling the bit rate over direct binary signalling.

Referring now to Figure 2, an orthogonal frequency division multiplexing arrangement 200 comprises four input channels 202a-d, an
20 inverse fast Fourier transform (IFFT) unit 204, and a fast Fourier transform unit 208 (FFT).

The IFFT units 204 generate, in this case, four sinusoidal sub-carriers 210a-d. The first sub-carrier 210a has a frequency and constitutes a
25 fundamental of the system. Each of the other three sub-carriers 210b-d have frequencies that are multiples of the frequency of the fundamental 210a, that is to say that they are harmonics of the fundamental 210a.

The input channels 202a-d carry digitised data to the IFFT unit 204
30 where the data is converted to a complex value. Each complex value is

applied to a respective sub-carrier 210a-d. This has the effect of varying the phase and amplitude of the respective sinusoidal sub-carriers 210a-d.

The sub-carriers 210a-d are combined to form a non-sinusoidal carrier wave 212. The carrier wave 212 is transmitted to a receiver where the
5 FFT unit 208 separates out the sub-carriers 210a-d and extracts the complex weightings from them. These complex weightings are then decoded to recover the strings of data applied at the input channels 202a-d.

10

Referring now to Figure 3, an encoder 300 comprises a serial to parallel converter 302 and a codeword generator 304. In use, a serial string of data 306 comprising a plurality of data blocks 308a-f spaced apart in time, is input into the convertor 302. The blocks 308a-f are output from
15 the convertor 302 at a plurality of output channels 310a-f simultaneously. This allows either the discrete output of data from a single data block of a serial data stream or alternatively the construction of multiple serial frames from data blocks spaced apart within the initial serial data stream 306. For example, in this case every seventh block of data will be
20 placed adjacent each other in a new frame 312a-f. These frames can be of indeterminate or user defined lengths.

Each of the frames 312a-f is coded into two codewords 314a, b by the generator 304. The two codewords 314a, b have a high degree of
25 redundancy and have differences between them maximised. This results in small variations in the input frames 312a-f giving large differences between codewords, for example a one bit difference between two frames can result in the variations of four or five symbols in the codewords generated by the generator 304. Also, the coding process builds in an
30 element of memory to the codewords, in that the codewords generated yield information about data within a given frame.

It is these codewords that are transmitted via the sub-channels in an OFDM system. In a multiple input-multiple, output (MIMO) OFDM system each codeword is sent to a respective transmission antenna,
 5 typically two or more antennas as this increases spatial diversity on transmit.

The reception antennas can be arranged to co-operate in order to spatially reject transmitted signals, by group interference suppression (GIS), this
 10 is shown in Figure 4.

Referring now to Figure 4, this shows the case for a plane wave incident upon a detector array two receiving elements 402a, b define an array aperture 404. A wavefront 406 is incident upon the aperture 404, at an
 15 angle θ to the normal of the aperture 404, along a vector A-A. Considering the two receiving elements 402a,b, the wavefront 406 must travel an additional distance y after being received by the element 402a before being received by the element 402b. From a simple geometric consideration it can be seen that $y = d \sin \theta$. This extra distance of travel
 20 introduces a phaseshift between the wavefront received at the two elements 402a, b, of:

$$\Phi = \left(\frac{2\pi}{\lambda} \right) d \sin \theta \quad \text{(Equation 1)}$$

Weighting units 408a,b apply a correction in order that the electric
 25 vectors of the respective fractions of the wavefront 406 detected at the receiving elements 402a, b are aligned prior to exiting this arrangement. Thus it can be seen that by altering weightings applied to the fractions of the wavefront 406 at the weighting units 408a,b the antenna array can be spatially scanned as each directions will exhibit a unique phase
 30 relationship between the receiving elements 402a,b.

It will be appreciated that the present invention is not limited to a plane wave situation and the above description should not be taken as limiting.

5 Referring now to Figure 5, a transmitted codeword, represented as a vector 502, is placed in a Cartesian framework. Any one of a number of possible symbols 504a-d within the signalling scheme could correspond to the transmitted symbol upon reception, and in order to determine between them a measure must be made of the straight line distance
10 between the terminal points of the vectors representing the codewords. The shortest Euclidean distance will constitute the best fit between the transmitted symbol upon reception and the allowable symbols within the signalling scheme.

15 Referring now to Figure 6, a wireless MIMO OFDM network 600, for example a wireless local area network (WLAN) or mobile telecommunications network, comprises a transmitter unit 602 and a receiver unit 604.

20 The transmitter unit 602 comprises a serial to parallel converter 606, typically a BLAST architecture, a frequency space encoder 608 a-n, a plurality of IFFT units 610 a-n and a plurality of transmit antenna 612 a-n. Each antenna 612 a-n is connected to a respective IFFT unit 610 a-n.

25 The receiver unit 604 comprises a plurality of receive antenna 614 a-h each of which is connected to a respective FFT unit 616 a-h, a decoder 618, including weighting units 619a-h for GIS, and a plurality channel state information (CSI) modules 620a, h. Each CSI module 620 a-h (only 2 shown) is associated with a respective FFT unit 616 a-h and
30 makes an estimation of the distortion to the received signals on each sub-carrier due to the path travelled by the received signal, for example, by

reflections of the signal from surfaces in the transmission path etc. The CSI also corrects for this at the receiving unit 604 in order to recover the transmitted symbols.

- 5 The FFT units 616 a-n separate out sub-carriers from a non-sinusoidal carrier wave. The sub-carriers are passed from the FFT units 616 a-n to the decoder 618 where GIS is carried out, using the weighting units 619a-h. Frequency-space vector Viterbi decoding is also carried out on the sub-carriers at the decoder 618 such that symbols transmitted from
10 the transmission unit 602 can be recovered.

- In a MIMO OFDM network sub-carriers with the same frequency will interfere with each other irrespective of which transmit antenna 612 a-n they originate from. This necessitates signal processing at the receiver
15 604 in order to correctly decode codewords transmitted from transmitting antennas 612 a-n, and hence recover transmitted data. In OFDM coding of symbols takes place across sub-carrier domains decoding takes place in both spatial and frequency (sub-carrier) domains. Thus, each transmit set of antennas 612 a-n is suppressed in turn, using GIS, in order to null
20 all but one group of transmitting antennas, decode the codeword and modify metrics used in maximum likelihood decoding of subsequent codewords.

This leads to linear equations to be solved where:

- 25 G is the number of transmit antenna groups;
 N_g^t is the number of transmit antennas in the g th group (typically 2), where $1 < g < G$;
 $\bar{c}_k = (c_k^1, c_k^2, \dots, c_k^{N_g^t})^T$ is the space-frequency symbol transmitted on the k th subcarrier frequency.
 30 For example, if the g th group has 2 transmit antennas within it then c_k^g will actually consist of two symbols transmitted simultaneously from the

transmit antennas. The symbols are part of the codeword that encompasses all the sub-carriers.

$$\mathbf{r}_k = \mathbf{H}_k \cdot \bar{\mathbf{c}}_k + \eta_k \quad (\text{Equation 2})$$

\mathbf{r}_k is the received signal at the k^{th} subcarrier frequency for all transmit antennas;

\mathbf{H} is a matrix of the CSI for each sub-carrier;

η_k is the additive white Gaussian noise at the receivers

In order for a given receiver to decode the g^{th} codeword the receiver suppresses space-frequency codewords originating from other groups of transmitters according to the following:

$$\theta_k(c_k^g) \mathbf{r}_k = \theta_k(c_k^g) \mathbf{H}_k \bar{\mathbf{c}}_k + \theta_k(c_k^g) \eta_k \quad (\text{Equation 3})$$

Where:

$\theta_k(c_k^g)$ is an orthonormal basis set for null space of a matrix composed of all columns of \mathbf{H}_k except for those corresponding to the transmit antennas forming the g^{th} group whose codeword it is desired to decode.

The decoder 618 takes the signal received at the antennas 614 a-n, and corrected for the signal path by the CSI units 620 a-n, and executes whole vector Viterbi decoding upon the signal. The maximum likelihood (ML) codeword transmitted from the g^{th} group of antennas is given by:

$$\tilde{\mathbf{c}} = \arg \min_{(\mathbf{c} \in \mathcal{C})} \sum_{k=0}^{K-1} \left\| \theta_k(c_k^g) \mathbf{r}_k - \theta_k(c_k^g) \mathbf{H}_k \tilde{\mathbf{c}}_k \right\|^2 \quad (\text{Equation 4})$$

Where:

$\tilde{\mathbf{c}}$ is the decoded codeword
 K is the total number of sub-carriers used

Equation 4 describes the process of searching over all possible space-frequency codewords that could have been sent by the g th transmit antenna group and selecting the most likely codeword given that
 5 codewords from all other groups of transmit antennas have been excluded via the GIS procedure. Once the a codeword is decoded the whole process is repeated taking into account the decoding of the decoded codeword, according to the following:

$$\tilde{c} = \arg \min_{(0 \ 0 \ \tilde{c}^g \ 0 \ c^{g'})} \sum_{k=0}^{K-1} \left\| \theta'_k(c_k^{g'}) r_k - \theta'_k(c_k^{g'}) H_k \tilde{d} \right\|^2 \quad (\text{Equation 5})$$

Where $\theta'_k(c_k^{g'})$ is an orthonormal basis for the null space of all columns of H_k except those corresponding to the transmit antennas of the current group g' being decoded and all the transmit antennas of previously
 15 decoded codeword groups.

Any previously decoded codeword is accounted for by modifying the ML metric such that any previously decoded codeword no longer need be suppressed through the GIS process. Thus, on each iteration the number
 20 of constraints on the GIS nulling matrix is reduced and hence a larger number of degrees of freedom available on the received signal. This leads to greater spatial diversity and improved performance in terms of robustness of communications.

25 In prior art arrangements search space would have to be reformulated using GIS in order to determine each codeword. This is no longer true maximum likelihood as the search space is artificially restricted by GIS. Such an approach is sub-optimum.

In a detection scheme in accordance with the present invention the detector 618 determines which of the received codewords has the greatest signal strengths typically by use of a comparator that compares the power, calculated from each CSI vector, in order to determine the relative power of each channel, and hence signal. The detector 618 thus determines the most likely codeword using equations 1 and 3 as hereinbefore described.

This scheme has the effect of changing the mean of the noise vector of the system to become the first detected codeword. Thus, the first codeword is ignored during the GIS procedure in determining the second code. This allows more degrees of freedom, by freeing receiving antennas to be used in the detection of lower power signals, thereby increasing the signal to noise ratio of such signals due to the inherent increase in receive diversity.

The first detected space time stream is explicitly incorporated into the branch metrics of the detection of the second code.

At each detection step an additional degree of freedom is introduced into the receive diversity as an additional receiving antenna or antennas 614a-n can be used for reception of a codeword. This is because at each detection step the previously detected codeword is ignored by the GIS procedure.

Assuming that the first, and subsequent, codewords are detected perfectly there is no impact on the detection of subsequent codewords by the Viterbi detector 618.

Referring now to Figures 7a-d, the modelled performance of a system in accordance with the present invention is shown in comparison to the

performance of a conventional frequency space coded (FSC)-BLAST-OFDM system using two transmit and four receiving antennas as shown in figure 6. Figures 7a and 7b being from a first decoding group (first two antennas) and Figures 7c and 7d being from a second decoding group. The system modelled has four codewords with two transmit antenna each, four receive antenna and assumed ideal channel state information, i.e. no distortion to the transmitted codes upon reception.

As can be seen from Figures 7a and 7c the bit error rate (BER) associated with the present invention is approximately 1.5 - 2 dB improved over the conventional FSC-BLAST-OFDM architecture at a given signal to noise ratio (SNR). This is however of only limited importance as the data transmitted over the network will usually be in the form of frames, typically fifty-four bytes in length. If an error is found in a frame the whole frame must be re-transmitted. Therefore what is of more interest than the BER is the frame error rate (FER). This is shown in Figures 7b and 7d and improvement of 1.5 to 2 dB in the FER over conventional FSC-BLAST-OFDM architectures is observed at a given SNR for an arrangement in accordance with the present invention.

Referring now to Figure 8, a method of signal processing that increases diversity on receive for sampling, thereby increasing the confidence with which later data symbols can be determined, comprises weighting a number of received signals in order to substantially null them (Step 800). A data symbol or codeword associated a non-nulled signal is determined using signal processing means that are arranged to execute a maximum likelihood estimation process upon the non-nulled signal (Step 802).

The number of signals nulled by the weighting means is reduced by one, i.e. the signal for which the symbol or codeword had been determined (Step 804). The symbol determined is included in the maximum

likelihood estimation procedure (Step 806) and another symbol or codeword is determined in the same manner as above (Step 808).

Referring now to Figure 9, a method for increasing data transfer capacity
5 across a network comprises receiving a signal composed of a plurality of
data carrying sub-channels at a number of receiving elements (Step 900).
A symbol or codeword associated with the signal received on the sub-
channel at the receiving element is determined using a maximum
likelihood estimation process (Step 904). The determined symbol or
10 codeword is incorporated in the determination of at least one other
symbol or codeword (Step 906).

CLAIMS

1. A method of determining each of a plurality of data symbols or codewords from a plurality of signals comprising the steps of:
- 5
- (i) weighting a number of said signals so as to substantially null said number of signals, using weighting means;
- (ii) determining a symbol or codeword associated with a, or each,
- 10 non-nulled signal using processing means arranged to execute a maximum likelihood estimation process upon said, or each, non-nulled signal;
- (iii) reducing the number of signals nulled by the weighting means by at least a number of non-nulled signals in step (ii);
- 15
- (iv) altering a maximum likelihood metric in accordance with the data symbol derived at step (ii); and
- (v) repeating steps (ii) to (iv).
- 20
2. The method of claim 1 including selecting signals with highest input power to be nulled at either, or both, of steps (i) and (iii)
3. The method of either of claims 1 or 2 including separating
- 25 frequencies of at least some of the plurality of signals by multiples of a harmonic frequency.
4. The method of any preceding claim including orthogonalising each of the plurality of signals.
- 30

5. The method of any preceding claim including transmitting the plurality of signals at a range of frequencies from a plurality of spatially separated transmitters.
- 5 6. The method of any preceding claim including providing a plurality of receivers arranged to receive said plurality of signals prior to step (i).
7. The method of any preceding claim including determining symbols that are, or form part of, codewords, the codewords being associated
10 with streams of symbols input to a transmitting means.
8. The method of any preceding claim including deriving a matrix of complex weighting co-efficients by the processing means to be either of steps (i) or (iii).applied to said weighting means in order to null said
15 signals at
9. The method of any preceding claim including sampling channel state information data to determine which signals are to be nulled at either, or both, of steps (i) and (iii).
- 20 10. The method of any preceding claim including using the vector Viterbi algorithm at step (ii).
11. A signal receiving apparatus comprising a plurality of receiving
25 elements, weighting means, and decoding means, each of the receiving elements having respective weighting means associated therewith, each of the receiving elements being arranged to receive a plurality of signals transmitted from a plurality of transmitters, the weighting means being arranged to apply a complex weighting function to each of a number of
30 said signals received by the receiving elements at a given frequency in order to null said number of said signals, the decoding means being

arranged to determine a symbol or codeword associated with a non-nulled signal and to incorporate said symbol or codeword in the determination of at least one further symbol or codeword.

5 12. Apparatus according to claim 11 including at least four receiving elements.

13. Apparatus according to either of claims 11 or 12 wherein each receiving element has a channel state information (CSI) unit arranged to
10 compensate for distortion to the signal received by the apparatus due to variations in the transmission path of said signal associated therewith.

14. Apparatus according to any one of claims 11 to 13 including an FFT unit arranged to separate each of a plurality of sub-carrier signals
15 from said received signals between each receiving element and the decoding means.

15. Apparatus according to any one of claims 11 to 14 wherein the decoding means include processing means arranged to carry out a
20 maximum likelihood estimation procedure upon a sub-carrier signal received at a receiving element in order to determine the symbol or codeword.

16. Apparatus according to claim 15 wherein the processing means is
25 arranged to carry out whole vector Viterbi decoding upon the signal.

17. Apparatus according to any one of claims 11 to 16 wherein the apparatus is arranged to execute the method of any one of claims 1 to 10

30 18. A method of increasing data transfer capacity across a network comprising the steps of:

- (i) receiving a signal comprising a plurality of data carrying sub-channels at a plurality of receiving elements;
- 5 (ii) suppressing a component of the signal associated with a given sub-channel received at all but one receiving element;
- (iii) determining a symbol or codeword associated with said signal received on said given sub-channel at said one receiving element using a
10 maximum likelihood estimation process; and
- (iv) incorporating the symbol or codeword into the maximum likelihood estimation process for the determination of at least one other symbol or codeword.
- 15
19. The method of claim 18 including parallelising data and encoding the data as a symbol or a space time codeword prior to transmission of the symbol or codeword over the network.
- 20 20. The method of either of claims 18 or 19 including providing more than four receiving elements arranged to receive the signal from the network.
21. The method of any one of claims 18 to 20 including applying a
25 whole vector Viterbi decoding to the signal at step (iii).
22. The method of any one of claims 18 to 21 providing the network in the form of a wireless local area network or a mobile telecommunications network.

23. A computer readable medium having stored therein instructions for causing a device to execute the method according to any one of claims 1 to 10 or claims 18 to 22.
- 5 24. A program storage device readable by a machine and encoding a program of instructions which when operated upon the machine cause the machine to operate as the apparatus according to any one of claims 11 to 17.
- 10 25. A method of determining each of a plurality of data symbols or codewords from a plurality of signals substantially as hereinbefore described with reference to the accompanying drawings.
26. A signal receiving apparatus substantially as hereinbefore
15 described with reference to the accompanying drawings.
27. A method of increasing data transfer capacity across a network substantially as hereinbefore described with reference to the accompanying drawings.

1/5

Fig.1.
(Prior art)


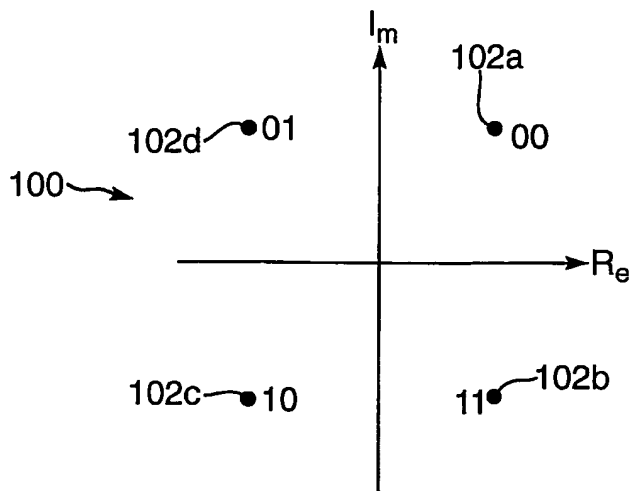


Fig.2.
(Prior art)

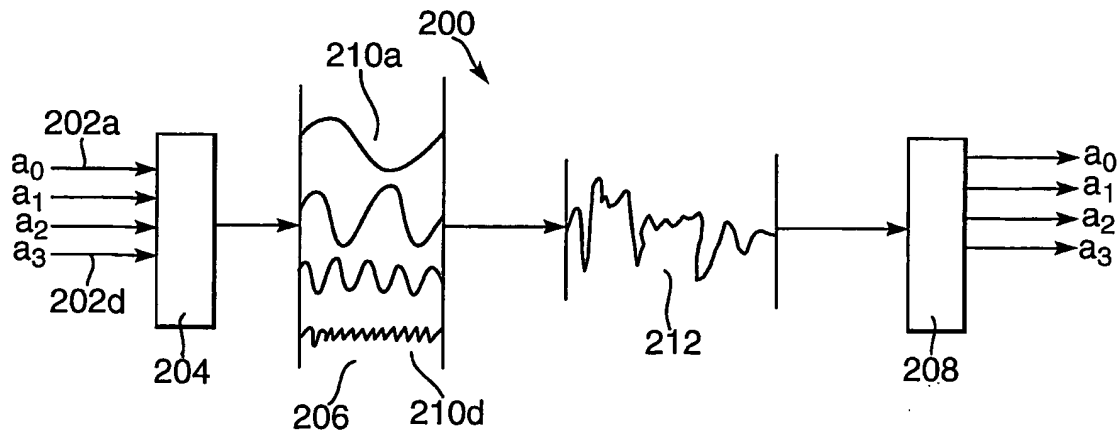

2/5

Fig.3.
(Prior art)


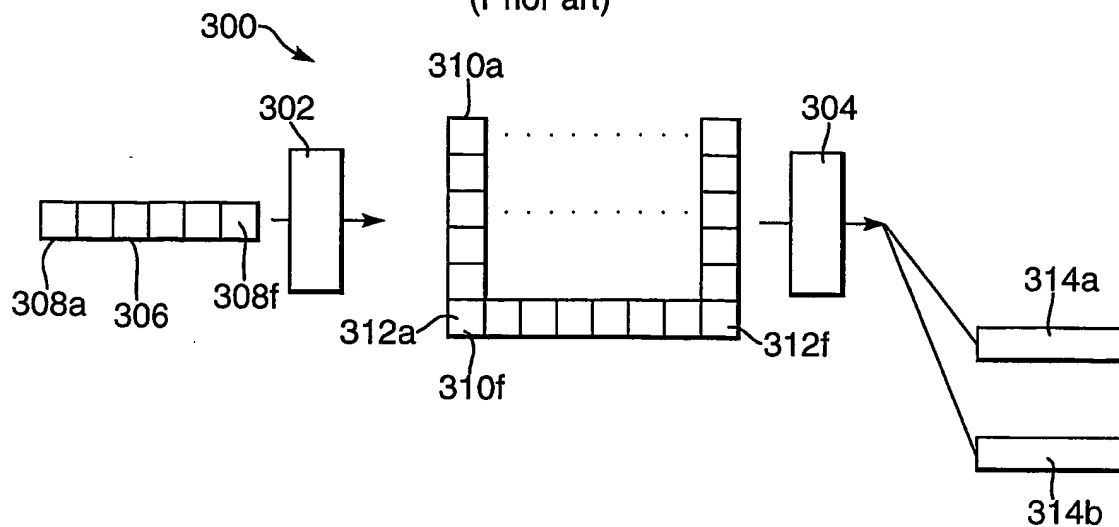


Fig.4.
(Prior art)

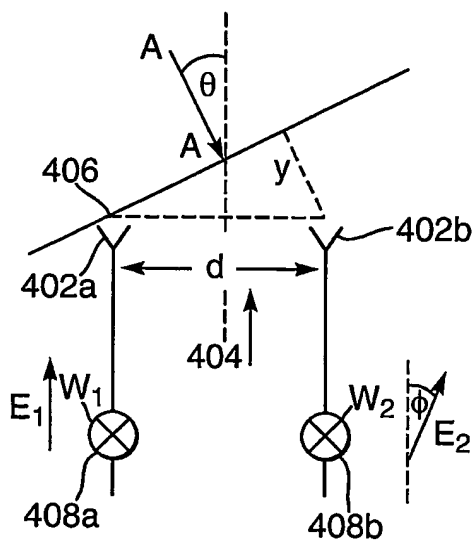

3/5

Fig.5.

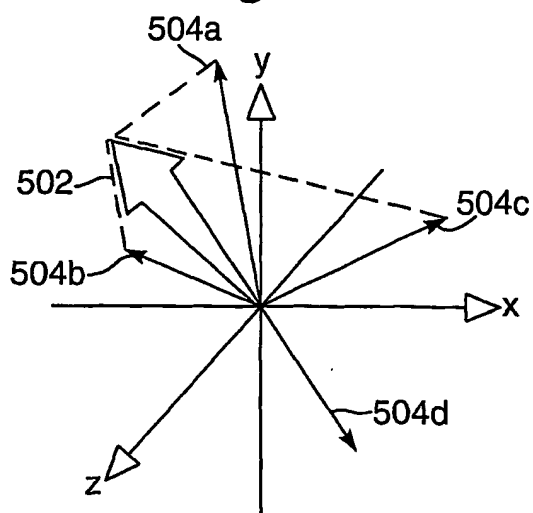


Fig.6.

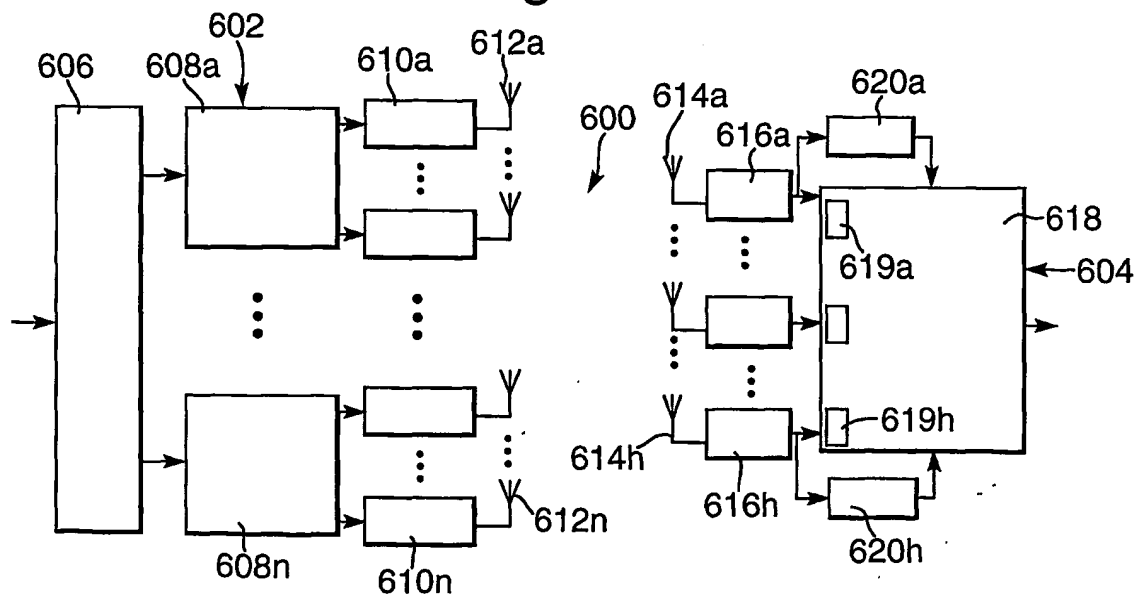


Fig.7a.

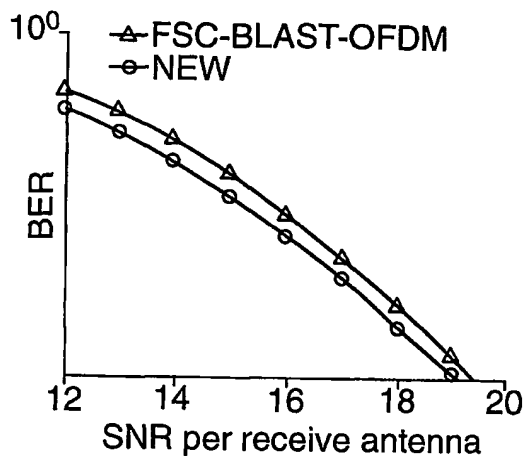


Fig.7b.

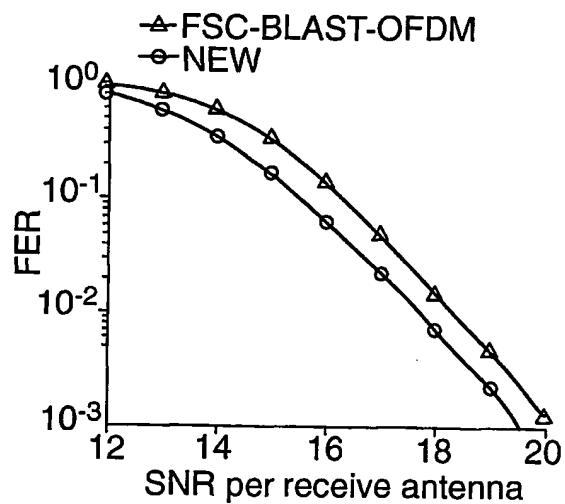


Fig.7c.


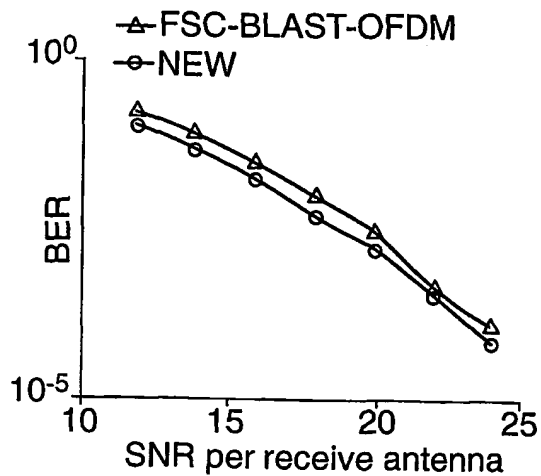


Fig.7d.

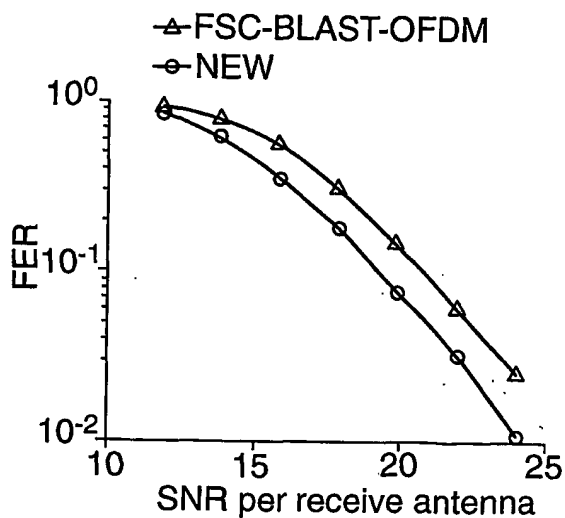

5/5

Fig.8.


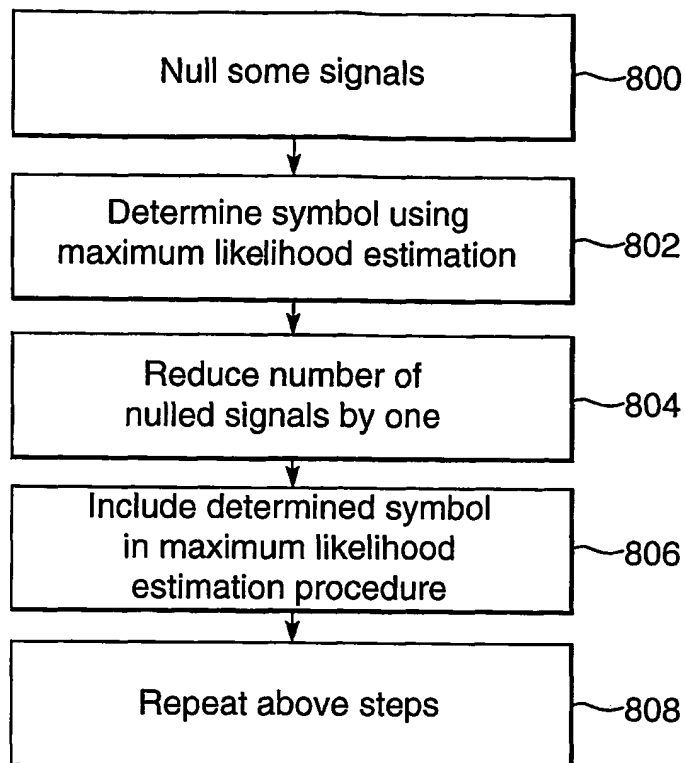


Fig.9.

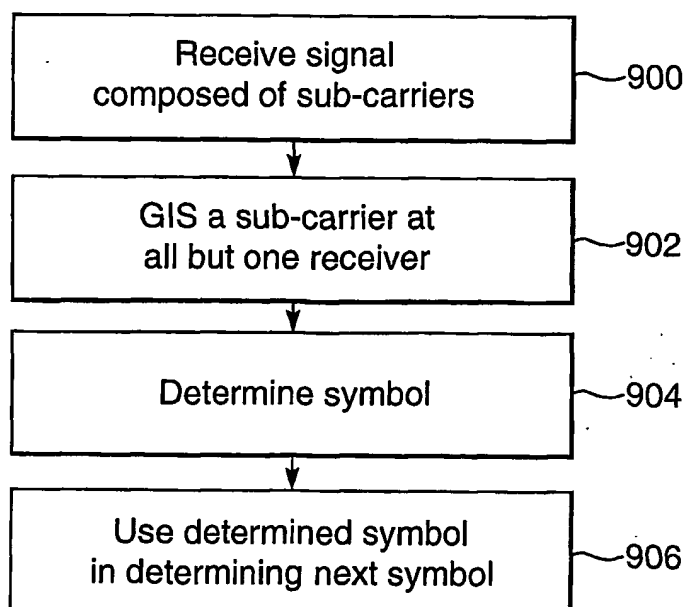

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 03/03741

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L1/06 H04L1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>TAO M ET AL: "Low complexity post-ordered iterative decoding for generalized layered space time coding systems"</p> <p>ICC 2001. 2001 IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS. CONFERENCE RECORD. HELSINKY, FINLAND, JUNE 11 - 14, 2001, IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS, NEW YORK, NY: IEEE, US, vol. 1 OF 10, 11 June 2001 (2001-06-11), pages 1137-1141, XP010553506</p> <p>ISBN: 0-7803-7097-1</p> <p>page 1138, right-hand column, line 23 - line 41</p> <p>page 1139, left-hand column, line 1 - line 17; figure 2</p> <p style="text-align: center;">--- -/--</p>	<p>1,2, 6-13, 15-27</p>

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *8* document member of the same patent family

Date of the actual completion of the international search

15 December 2003

Date of mailing of the international search report

29/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Papantoniou, A

INTERNATIONAL SEARCH REPORT

Internati plication No
PCT/GB 03/03741

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>EP 1 146 661 A (MITSUBISHI ELECTRIC CORP) 17 October 2001 (2001-10-17) page 2, paragraph 5 page 3, paragraphs 9-11,14 page 10, paragraph 64 - paragraph 68 page 13, paragraph 90 -page 14, paragraph 100; figures 2,12,13</p> <p>---</p>	1,11,17, 18,23-27
A	<p>FOSCHINI G J ET AL: "SIMPLIFIED PROCESSING FOR HIGH SPECTRAL EFFICIENCY WIRELESS COMMUNICATION EFFICIENCY WIRELESS COMMUNICATION EMPLOYING MULTI- ELEMENT ARRAYS" IEEE JOURNAL ON SELECTED AREAS IN COMMUNICATIONS, IEEE INC. NEW YORK, US, vol. 17, no. 11, November 1999 (1999-11), pages 1841-1852, XP000880701 ISSN: 0733-8716 page 1843, left-hand column, line 38 -right-hand column, line 19 page 1843, right-hand column, line 40 -page 1844, left-hand column, line 18 figures 2,4</p> <p>---</p>	1,11,17, 18,23-27
A	<p>WOLNIANSKY P W ET AL: "V-BLAST: an architecture for realizing very high data rates over the rich-scattering wireless channel" SIGNALS, SYSTEMS, AND ELECTRONICS, 1998. ISSSE 98. 1998 URSI INTERNATIONAL SYMPOSIUM ON PISA, ITALY 29 SEPT.-2 OCT. 1998, NEW YORK, NY, USA,IEEE, US, 29 September 1998 (1998-09-29), pages 295-300, XP010316748 ISBN: 0-7803-4900-8 page 296, right-hand column, line 7 -page 297, left-hand column, line 27 page 297, right-hand column, line 6 -page 298, left-hand column, line 15</p> <p>-----</p>	1,11,17, 18,23-27

INTERNATIONAL SEARCH REPORT

information on patent family members

Internati

Application No

PCT/GB 03/03741

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1146661	A	17-10-2001	CA 2359077 A1	17-05-2001
			EP 1146661 A1	17-10-2001
			US 2001046270 A1	29-11-2001
			CN 1336046 T	13-02-2002
			WO 0135549 A1	17-05-2001